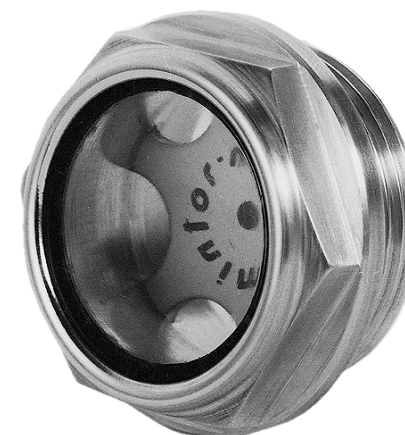


# TLA/F

## Visual level indicator with milled head

- ▶ Standard polyamide transparent inspection window unaffected by high or low temperatures.
- ▶ Avoid contacts with **alcohol and solvents**.
- ▶ Head milling produces a crown with greater sealing area against the crankcase.
- ▶ Special version: with Pyrex glass for high temperatures.


[PRINTING NOTES](#)
[PRINT](#)

TYPE	CODE	GAS	v	e	f	t	d
TLA/F1G	1GL/F10A	3/8"	10	18	9	9	22
TLA/F2G	1GL/F20A	1/2"	16	22	10	9	28
TLA/F3G	1GL/F30A	3/4"	21	27	12	11	32
TLA/F4G	1GL/F40A	1"	27	34	12,5	12	40
TLA/F5G	1GL/F50A	1"1/4	37	46	15	12	50

TYPE	CODE	MB series	v	e	f	t	d
TLA/F1M	1ML/F10A	16 x 1,5	10	18	9	9	22
TLA/F2M	1ML/F20A	18 x 1,5	13	20	9	9	26
TLA/F3M	1ML/F30A	20 x 1,5	16	22	10	9	28
TLA/F4M	1ML/F40A	22 x 1,5	16	22	10	9	28