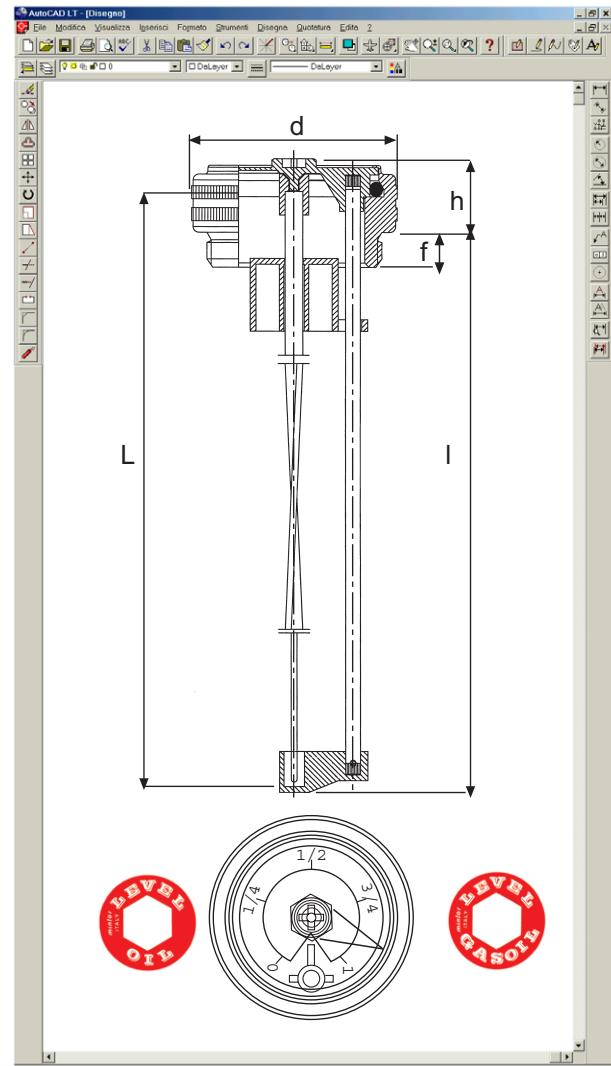


[HOME](#)[INDEX](#)[FORWARD](#)[BACK](#)[TECHNICAL DATA](#)[HOW TO CONTACT US](#)

Registered model

[PRINTING NOTES](#)[PRINT](#)[QUIT](#)

# TC/ZLG

## Visual level indicator with float system

- ▶ Composed of aluminium light alloy male cover with orientable dial.
- ▶ Complete with float system, it allows an exact and constant indication of the level of fluid inside the tank.
- ▶ Especially designed for application on **agricultural, earth moving, building machinery and hydraulic units**.
- ▶ Supplied with O-ring.
- ▶ Temperature during use 80°C max.
- ▶ By request with breather.
- ▶ Avoid contacts with **alcohol and solvents**.

TYPE	OIL CODE	GASOIL CODE	GAS	L	d	h	f	I
TC/ZLG1G	1LGTM304	1LGTM300	2"	200	70	25	12	192
TC/ZLG2G	1LGTM305	1LGTM301	2"	300	70	25	12	292
TC/ZLG3G	1LGTM306	1LGTM302	2"	350	70	25	12	342
TC/ZLG4G	1LGTM307	1LGTM303	2"	400	70	25	12	392

TYPE	OIL CODE	GASOIL CODE	METRIC	L	d	h	f	I
TC/ZLG1M	1LGTM404	1LGTM400	60 X 2	200	70	25	12	192
TC/ZLG2M	1LGTM405	1LGTM401	60 X 2	300	70	25	12	292
TC/ZLG3M	1LGTM406	1LGTM402	60 X 2	350	70	25	12	342
TC/ZLG4M	1LGTM407	1LGTM403	60 X 2	400	70	25	12	392

